

Form PTO-1390
P21938.P01U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

P21938

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371U.S. APPLICATION NO. (If known, see 37 CFR
1.5)**10/030177**

INTERNATIONAL APPLICATION NO.

PCT/DE00/02659

INTERNATIONAL FILING DATE

02 August 2000

PRIORITY DATE CLAIMED

03 August 1999

TITLE OF INVENTION

METHOD AND DEVICE FOR REMOVING RECOVERABLE WASTE PRODUCTS AND NON-RECOVERABLE WASTE PRODUCTS

APPLICANT(S) FOR DO/EO/US

Harald MARTIN and Hartwig STREITENBERGER

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
"Unexecuted"
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (U.S.C. 371(c)(5)).

Items 11 to 16 below concern other document(s) or information included:

11. Assignee: _____
12. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
13. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
14. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ Figure of Drawing to be published _____
18. ☒ Other items or information:
 - Cover Sheet and International Application as published in German.
 - PCT/IPEA/416(in German).
 - PCT/IPEA/409-with two sheets of amended pages(in German).
 - PCT/IB/301.
 - PCT/IB/304.
 - PCT/IB/308.
 - PCT/IB/332.
 - PCT/ISA/210
 - Cover Letter under 35 U.S.C. 371 and 1.495.
 - Claim of Priority.


U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <div style="font-size: 24pt; font-weight: bold; margin-left: 100px;">10/030177</div>		INTERNATIONAL APPLICATION NO. PCT/DE00/02659		ATTORNEY'S DOCKET NUMBER P21938	
---	--	---	--	------------------------------------	--

19. <input checked="" type="checkbox"/> The following fees are submitted: <div style="margin-left: 40px;"> Basic National Fee (37 CFR 1.492(a)(1)-(5)): Search report has been prepared by the EPO or JPO. \$ 890.00 International preliminary examination fee paid to USPTO (37 CFR 1.482). \$ 710.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO(37 CFR 1.445(a)(2)). \$ 740.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO. \$1,040.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4). \$ 100.00 <div style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div> </div>				<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%;">CALCULATIONS</th> <th style="width:50%;">PTO USE ONLY</th> </tr> <tr><td style="height: 100px;"></td><td></td></tr> </table>		CALCULATIONS	PTO USE ONLY		
CALCULATIONS	PTO USE ONLY								
Surcharge of \$130.00 for furnishing the oath or declaration later than <u> 20 </u> <u> 30 </u> months from the earliest claimed priority date (37 CFR 1.492(e)).				\$					
Claims	Number Filed	Number Extra	RATE						
Total Claims	- 20 =		X \$18.00	\$					
Independent Claims	- 3 =		X \$84.00	\$					
Multiple dependent claim(s) (if applicable)				+ \$280.00	\$				
TOTAL OF ABOVE CALCULATIONS =				\$890.00					
<u> </u> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$					
SUBTOTAL =				\$890.00					
Processing fee of \$130.00 for furnishing the English translation later than <u> 20 </u> <u> 30 </u> months from the earliest claimed priority date (37 CFR 1.492(f)).				+					
Extension of Time fee in the amount of \$									
TOTAL NATIONAL FEE =				\$890.00					
Fee for recording the enclosed assignment (37 CFR 1.21(h). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				+					
TOTAL FEES ENCLOSED =				\$890.00					
				Amount to be refunded	\$				
				Charged	\$				

a. ☒ A check in the amount of \$890.00 to cover the above fees is enclosed.
 b. Please charge my Deposit Account No. in the amount of \$ to cover the above fees.
 c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 19-0089.


NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.127(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO CUSTOMER NO. 7055
 AT THE PRESENT ADDRESS OF:
 Neil F. Greenblum
 GREENBLUM & BERNSTEIN, P L C.
 1941 Roland Clarke Place
 Reston, VA 20191
 (703) 716-1191



07055

PATENT TRADEMARK OFFICE

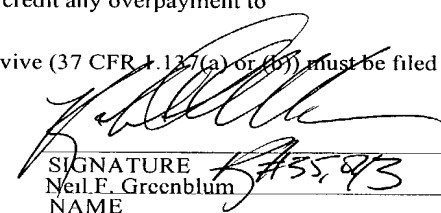
SIGNATURE
Neil F. Greenblum
NAME

28,394
REGISTRATION NUMBER

Rec'd PCT/PTO 11 MAR 2002

P21938.A01

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Harald MARTIN et al.)
) Applications Branch
 Appln. No. : 10/030,177)
)
 Filed : February 1, 2002)
)
 For : METHOD AND DEVICE FOR REMOVING RECOVERABLE WASTE
 PRODUCTS AND NON-RECOVERABLE WASTE PRODUCTS

**PRELIMINARY AMENDMENT AND COVER LETTER
 SUBMITTING AMENDED PAGES OF APPLICATION**

Commissioner of Patents and Trademarks
 Washington, D.C. 20231

Sir:

Enclosed please find a partial English language translation of the International Preliminary Examination Report - Form PCT/IPEA/409 (hereinafter "Report"), which Report was submitted to the Examiner on February 1, 2002. Applicants note that this Report was drawn on pages of description 1 - 10 and claims 17 - 32 as originally filed, and claims 1 - 16 as filed September 27, 2001, and includes as an Annex claims 1 - 16 (in German). For the Examiner's convenience, an English translation of the Annex is submitted herewith, in which each sheet is identified on the bottom of the page as "MODIFIED SHEET."

Based upon the submission of the amended sheets of claims, Applicants respectfully request examination on the merits of the application containing pages of description 1 - 10 and claims 17 - 32 as originally submitted and amended pages of claims 1 - 16 (in place of originally filed claims 1-16).


P21938.A01

REMARKS


Entry of the foregoing replacement sheets upon which the International Preliminary Examination Report is based is respectfully requested.

Should there be any questions, the Examiner is invited to contact the undersigned at the below listed number.

Respectfully submitted,
Harald MARTIN et al.



Neil F. Greenblum
Reg. No. 28,394



March 8, 2002
GREENBLUM & BERNSTEIN, P.L.C.
1941 Roland Clarke Place
Reston, VA 20191
(703) 716-1191

Claims

1. Method for removing recoverable waste products and non-recoverable waste products, with which the recoverable waste products and non-recoverable waste products are fed into in an essentially horizontally fixed container as material from one side, and in it continuously and discontinuously transported to the other side of the container, with 60 - 80% of the energy input being carried out on the material in the area of the side of the inflow of the material in the first quarter of the container, and the remaining 20 - 40% of the energy being transferred to the material in the other areas of the container, on the other side of the container the entire exhaust gas-solids mixture is discharged from the container and subsequently the exhaust gases and the solids are subjected to an energy recovery process.
2. Method according to claim 1, in which the inserted materials feature a residual moisture of 10%.
3. Method according to claim 1, in which the material is transported continuously at a speed of 18 m/h to the discharge opening.
4. Method according to claim 1, in which an energy input on the material of 70% is carried out in the first quarter of the container.
5. Method according to claim 1, in which in each further quarter of the container an energy input of 10% each is carried out.
6. Method according to claim 1, in which the energy input in the first quarter is carried out by a burner.
7. Method according to claim 1, in which the energy input in the further quarters of the container is carried out by heated air.

MODIFIED SHEET

8. Method according to claim 1, in which the energy input is carried out at least in the first quarter directly on the material.
9. Method according to claim 1, in which a maximum temperature of 600 -700 °C is implemented in the container to start the process.
10. Method according to claim 1, in which the discharged exhaust gas-solids mixture is fed into a device for cracking the long-chain hydrocarbons after the container.
11. Method according to claim 1, in which after the container the discharged exhaust gas-solids mixture or after the cracking of the long-chain hydrocarbons, the exhaust gas-solids mixture is conveyed to a device for the gasification of the energy components.
12. Method according to claim 11, in which the gasification is carried out with hypostoichiometric air supply.
13. Method according to claim 11 in which the gasification process is regulated via the partial combustion process.
14. Method according to claim 11, in which steam is added to the gasification process.
15. Device for removing recoverable waste products and non-recoverable waste products, comprising a tubular container with a feed opening for the recoverable and non-recoverable waste products as material on one side and with a discharge opening for the exhaust gas-solids mixture on the other side, a shaft arranged centrally through the container on which devices are located and a device for cracking hydrocarbons and/or a device for the gasification of the solids from the container, that are arranged after the discharge opening of

P21938.MD1

11

PCT/DE00/02659

the container.

16. Device according to claim 15, in which the tubular container is made of sheet metal in a double-walled construction.

MODIFIED SHEET

10/030/77

P21938.S01

Rec'd PCT/PTO 11 MAR 2002

PCT/DE00/02659

Method and Device for Removing Recoverable Waste Products and Non-recoverable Waste Products

Technical Field

[0001] The invention relates to the fields of the paper industry, waste management and mechanical engineering and concerns a method and device for removing recoverable waste products and non-recoverable waste products, in particular non-recoverable waste products that occur in the paper industry and are to be utilized as efficiently as possible.

Prior Art

[0002] In the processing of recovered paper in the recycling process, residual matter remains after the elutriation of the mechanical desludging. This residual substances can contain, in varying amounts, concentration and type, clumped paper, cardboard remnants, plastic pieces, wood residues, metal parts, and more besides. As a whole, these residual substances are called rejects. After exiting the elutriation process and, if necessary, after intermediate deposition during which a gravimetric dewatering can occur, these rejects are, in general, deposited at a hazardous waste landfill.

[0003] At this point, these rejects contain an average of 50% water, which can occur as surface water and also as water absorbed in the paper and wood portion.

[0004] Various methods and devices are already known or have been described which include the utilization and, in particular, the thermal treatment of waste, residual substances and rejects.

[0005] A method for the thermal recovery of non-recoverable waste products is known from DE 41 39 512 A1. In this case, the non-recoverable waste products are household refuse, industrial waste containing plastics, paint residue, scrap tires, shredder light material from the recycling of scrap cars, or waste contaminated with oils. According to this method, these non-recoverable waste products are subjected without costly pretreatments to a combination of known processing stages, such as pyrolysis, crushing, classification, gasification and gas cleaning. This method is intended on the one hand to produce a clean gas suitable for versatile material and energy uses, and on the other to yield elutriation-proof, useable or easy to dump purely mineral, solid residue, while at the same time ruling out toxic impact on the environment.

[0006] Furthermore, according to DE 44 41 423 a method and device are known that are used to extract useable gas from waste by means of pyrolysis. With this method, the crushed waste is loaded in a pyrolysis drum sealed gas-tight, in which the pyrolysis gas is produced and the pyrolysis residue is separated. The pyrolysis gas is split into a cracked gas in a gas transformer with the addition of air and in the presence of a red-hot coke bed. The heat necessary for pyrolysis is transferred by a gas in direct contact with the material to be pyrolyzed. A partial stream of this gas is the cracked gas leaving the gas transformer.

[0007] A method for utilizing a starting material is also known from DE 43 34 544. With this method the starting material of polymer or other packing material with or without residual content that can be carbonized or not or pyrolyzed or not, is loaded in a reaction chamber. In this reaction chamber the components that can be carbonized are carbonized and the components that can be pyrolyzed are pyrolyzed, the gases produced being used as energy sources for a firing and the residual substances being taken out for further treatment.

[0008] According to DE 42 09 549 a method is known for the thermal treatment of residual substances, e.g. for the separation and recovery of metal compounds with organic content by means of a combination of pyrolysis and gasification. According to this method, the residual substances are separated in a gas and a solid phase and decomposed by means of pyrolysis at 300 to 700° C. Existing, usable products are separated from the solid phase and the remaining materials, together with the gas phase, are gasified to fuel gas with oxygen-enriched air or oxygen at temperatures > 1300° C.

[0009] Furthermore, a method is known from DE 36 32 105 for removing fissile contaminants from a pyrolysis gas. Accordingly, the pyrolysis gas, which was produced by the pyrolysis of a material containing carbon and/or hydrocarbon, is fed into a reaction chamber together with a gas heated in a plasma generator, and there the contaminants are split off so that the gas can now be supplied directly to the consumer.

[0010] According to DE 38 26 520 A1, a method is also known for the pyrolysis of sewage sludge in an externally heated, fixed reactor with an internally located transport apparatus, in which the pyrolysis, as a controllable process separate in terms of time and location, is carried out in several stages of drying, heating to decomposition temperature, pyrolysis in several temperature ranges and recovery of the pyrolysis residue as fuel.

[0011] The first stage here is dewatering the sewage sludge, the second stage is heating the dried product to 200 - 250° C, the third stage is the thermal decomposition of the sewage sludge to pyrolysis gases and a carbonaceous residue at 251 to 700° C, preferably at 300 - 500° C, and the fourth stage is the combustion of the pyrolysis gases produced and the application of the hot gas to heat the reactor in separate heating zones according to stages 1, 2 and 3.

[0012] Furthermore, a method and a device are known from DE 34 17 620 that are used to produce thermal energy that can be converted into mechanical energy from the incineration of wet waste. The invention assumes that the moisture in wet waste must be removed before it can be incinerated. A heat source for drying the waste here can be the steam that vaporizes from the wet waste, or the other heat source is the flue gas from the incineration plant. The device for implementing this invention comprises a waste drying apparatus with a feed screw, a continually agitating dryer, a second feed screw, a closed and insulated conveyor, an air supply chamber, an air supply plant with a blower and three air preheaters and a thermal energy supply plant for the dryer with a pressurizing apparatus and a supply unit.

[0013] A device for treating materials containing aluminum is furthermore known from DE 42 37 161 A1. This device comprises an indirectly heated rotary kiln with a conveyor arranged inside a gas-tight revolving cylinder, two sluices and a feed hopper and a wire shaking apparatus. The conveyor inside the gas-tight revolving cylinder is a conveyor screw that is used to circulate the product treated.

[0014] Furthermore, a plant is known from DE 195 28 018 A1 for the thermal treatment of materials with organic components, in which a revolving cylinder is arranged essentially concentrically around a shaft and connected to it, inside a housing that can be filled with hot gas.

[0015] According to DE 43 37 421 A1 a multistage, high-temperature incineration of waste products with inert components and a device for carrying out this process are known. In a first stage at first an hypostoichiometric incineration and in the second stage a further incineration is carried out in a closed chamber.

[0016] Maintaining high safety standards is disadvantageous with all of these methods and devices, since the processing stages applied, in particular pyrolysis and gasification, have to be carried out in part with the exclusion of air and at high temperatures.

Representation of the Invention

[0017] The object of the invention is achieve as completely as possible the removal of recoverable waste products and non-recoverable waste products used, using a device that is simpler to use and easier to regulate, while reducing the environmental impact to a minimum.

[0018] The solution according to the invention makes it possible to reclaim recoverable waste products and non-recoverable waste products almost completely in an environmentally friendly way, thereby producing energy that can be used in part for maintaining the process according to the invention. However, it can also be used for other energy-intensive processes.

[0019] The operating principle of the device according to the invention, using the method according to the invention, is as follows.

[0020] Recoverable and non-recoverable waste products from the most varied fields, e.g. from the paper industry (rejects) or from the leather industry, or household waste or hazardous waste are brought in. These products and materials are very inhomogeneous, made up of the most varied inorganic and organic materials, and often compacted together or compressed.

For this reason it is necessary to separate these products and materials. This can be carried out by devices known per se in the form of shredders, rippers or choppers.

[0021] After separating the products and materials, a selection is carried out. This selection focuses in particular on separating metallic from nonmetallic materials. All metallic materials can be fed to another reclamation.

[0022] The recoverable and non-recoverable waste products thus processed are then conveyed to a device for preheating and/or drying.

[0023] The separated and selected and, if necessary, preheated and/or dried material is fed into the tubular container on one of its sides via a feed opening.

[0024] A shaft extends through the middle of the fixed container, which can be cooled or insulated. Devices are located on this shaft for transporting and loosening and mixing the material in the container. By means of the devices on the shaft, the material in the container is transported continuously or discontinuously in the direction of the discharge opening.

The devices on the shaft are advantageously paddles featuring pitched surfaces. These paddles are likewise advantageously attached to the shaft by form-closed keyed joints. This means they

can be easily exchanged.

[0025] The shaft is advantageously embodied in tubular form and located on each face of the container on the outside.

[0026] In the lower area, grates are arranged in the container over its entire length, on which the material is deposited and transported forwards in the direction of the discharge opening. These grates render possible the input of energy through the inflow of heated air from below. While the material is in the container it is charged with energy and thereby pyrolyzed and gasified. The energy input takes place in the start-up process through the direct insertion and impingement of the material with heated air and after the onset of gasification by the partial combustion of the gases produced. The energy input is thereby qualitatively divided. Between 60 and 80% of the energy input is applied to the material in approx. the first quarter of the container. The remaining 20 to 40% of the energy is applied in the remaining three quarters of the container. The energy input takes place via heated air directly on the material.

[0027] At the start of the process a kind of hot bed of red-hot, thermally decomposed recoverable and non-recoverable waste products is produced in this area of the container through the supply of energy, which bed is repeatedly fed by the subsequently delivered, preheated material. A maximum temperature of 600 - 700°C is thereby achieved in the container. This hot bed is likewise transported further in the direction of the discharge opening and subsequently discharged through the sluice-like discharge opening. These solid decomposition products are of a coke-like nature.

[0028] The burning heat in this hot bed is maintained by the subsequent supply of material to be decomposed and by the addition of oxygen or air. A device for the regulated addition of air or oxygen for thermal decomposition is located under the hot bed, advantageously over the entire length of the area.

[0029] Through the controlled and regulated feeding of air or oxygen into the area of the thermal decomposition, a controllable thermal decomposition is achieved that can be regulated very precisely in terms of temperature control by means of the amount of air or oxygen added. The more air or oxygen is added, the higher the temperature in the area of the thermal decomposition of the container.

can be easily exchanged.

[0025] The shaft is advantageously embodied in tubular form and located on each face of the container on the outside.

[0026] In the lower area, grates are arranged in the container over its entire length, on which the material is deposited and transported forwards in the direction of the discharge opening. These grates render possible the input of energy through the inflow of heated air from below. While the material is in the container it is charged with energy and thereby pyrolyzed and gasified. The energy input takes place in the start-up process through the direct insertion and impingement of the material with heated air and after the onset of gasification by the partial combustion of the gases produced. The energy input is thereby qualitatively divided. Between 60 and 80% of the energy input is applied to the material in approx. the first quarter of the container. The remaining 20 to 40% of the energy is applied in the remaining three quarters of the container. The energy input takes place via heated air directly on the material.

[0027] At the start of the process a kind of hot bed of red-hot, thermally decomposed recoverable and non-recoverable waste products is produced in this area of the container through the supply of energy, which bed is repeatedly fed by the subsequently delivered, preheated material. A maximum temperature of 600 - 700°C is thereby achieved in the container. This hot bed is likewise transported further in the direction of the discharge opening and subsequently discharged through the sluice-like discharge opening. These solid decomposition products are of a coke-like nature.

[0028] The burning heat in this hot bed is maintained by the subsequent supply of material to be decomposed and by the addition of oxygen or air. A device for the regulated addition of air or oxygen for thermal decomposition is located under the hot bed, advantageously over the entire length of the area.

[0029] Through the controlled and regulated feeding of air or oxygen into the area of the thermal decomposition, a controllable thermal decomposition is achieved that can be regulated very precisely in terms of temperature control by means of the amount of air or oxygen added. The more air or oxygen is added, the higher the temperature in the area of the thermal decomposition of the container.

[0030] According to the invention, thermal decomposition is a controlled process between pyrolysis and incineration of the supplied material.

[0031] However, according to the invention a complete incineration of the supplied material does not occur, since air or oxygen is always added to the process only in hypostoichiometric amounts and the oxygen released in any case is combusted by the open flame arranged in the area.

[0032] It is thereby possible to have to conduct the process under not absolutely gas-tight conditions, which leads to a considerably more cost-effective device. The safety requirements are thereby no longer as high, either.

[0033] After the start of the process, thermal decomposition occurs with the release of energy.

[0034] In the area of the thermal decomposition in the container, regulable temperatures of up to 900 °C are produced and maintained. Advantageously, temperatures are set between 400 and 800 °C.

[0035] In addition to the solid decomposition products comprising mainly carbon, a crude gas with a temperature of 700 - 800 °C is also produced with thermal decomposition. These are extracted from the container through the discharge opening as an exhaust gas-solids mixture and fed through ducts to a device for cracking the long-chain hydrocarbons and/or a device for the gasification of the solids. In this way the exhaust gases and solids from the container are processed for energy recovery.

[0036] An ignition source is advantageously installed in the tubular container in the area of the discharge opening. This ignition source can be a burner with an open flame or a spiral-wound filament. They are used to burn up any oxygen possibly still existing before the discharge of the exhaust gas-solids mixture from the container.

[0037] Furthermore, a pressure release opening is advantageously installed in the upper area of the tubular container in the area of the discharge opening. This opens when an excess pressure is reached in the tubular container, which, however, does not occur in carrying out the method according to the invention. In the case of breakdowns or damage, the possible occurrence of such an excess pressure in the tubular container can thus be reduced. This pressure release opening can be embodied as a flap or as a weighted safety valve.

Best Way of Implementing the Invention

[0038] The invention is described in greater detail below on the basis of an exemplary embodiment.

[0039] A cylindrical, fixed container with the dimensions: length 8000 mm, interior diameter 1600 mm, features a feed opening in the upper left area, through which opening the preheated material is transported into the container. The container further features a burner opening in the lower left part. A shaft with paddles extends through the center of the container inside over the entire length of the container. This tubular shaft with paddles is powered by a motor that is installed outside the container.

[0040] An inlet for heated air is arranged in the lower area of the container over its entire length. The discharge opening serves to draw off the entire exhaust gas-solids mixture arriving at the end of the container.

[0041] Recoverable and non-recoverable waste products from the paper industry are used which feature the following composition.

Paper and cardboard remnants, clumped, 1.0 to 3.0 cm edge length,

Wood pieces, mechanically broken up, partially fibrous surface, 0.5 to 5 cm edge length,

PE foil and plastic remnants, partially in clumps, up to 10 cm²,

Rubber pieces, as strips and cords, wound, 0.5 to 3.0 cm,

Fabric remnants, fiberized as pieces, 1 cm² to 5 cm²,

Ferrous metal, as wire pieces, sheet-metal strips and in crushed form shredded, 0.5 to 3 mm edge length or diameter,

Aluminum foil, as pieces or crushed to 2 cm diameter crushed,

Tin plate, beverage cans, crushed.

The gross weight of these products and materials amounts to approx. 0.35 kg/dm³.

The water content amounts to approx. 40%.

[0042] These products and materials are separated by spiked rollers. The flow rate is 5 t/h. Subsequently, the separated material is treated with a magnet and the selected metal parts removed. Afterwards the material is transported via a conveyor system to a drying tower, where it is heated to approx. 80 °C and the water is removed. The length of time in the drying tower

is approx. 1.5 h.

[0043] Afterwards the dried material is continuously conveyed into the container via conveyer belts and the feed opening, which is embodied as a stuffing screw with a gate valve in the upper left part of the container. In the container, the material is moved by the shaft with paddles in the direction of the discharge opening with a rotational speed of 5 - 7 revolutions/min. The remaining moisture is thus removed.

[0044] An inlet for heated air is located in the lower area of the feed opening under the grates in the container. A burner is positioned in the feed segment which heats the arriving air to the necessary temperature of 600 °C. By the direct impingement of the heated air on the intake material in the first quarter, a hot bed is produced that is fed by the following material and the heat is maintained by the heated air (3.2 m³/h) and by the beginning partial combustion of the gases produced. The fed material is thermally decomposed and the solid decomposition products in the form of 95 - 98% crystalline carbon, so-called pyrolysis coke, are discharged through the discharge opening together with the exhaust gas and conveyed to a further energy recovery process.

[0045] After the start of the process, temperatures of approx. 700 °C prevail in the area of thermal decomposition. To start the process, the temperature is produced by the inflow of heated air. Afterwards the energy continues to be fed through heated air and through the starting partial combustion of the gases produced. The heated air flows from below through the grate to the material and maintains the necessary temperature in the hotbed up to the discharge opening.

[0046] The exhaust gas-solids mixture produced is conveyed after the container via ducts to a device for cracking the long-chain hydrocarbons and from there transferred to a device for the gasification of the solids. The materials thus subjected to a further energy recovery process can be used as heating gas for other thermal processes. The residual solid has 90% mineral components and can be disposed of as ash.

Claims

1. Method for removing recoverable waste products and non-recoverable waste products, with which the recoverable waste products and non-recoverable waste products are fed into in an essentially horizontally fixed container as material from one side, and in it continuously and discontinuously transported to the other side of the container, with 60 - 80% of the energy input being carried out on the material in the area of the side of the inflow of the material, and the remaining 20 - 40% of the energy being transferred to the material in the other areas of the container, on the other side of the container the entire exhaust gas-solids mixture is discharged from the container and subsequently the exhaust gases and the solids are subjected to an energy recovery process.
2. Method according to claim 1, in which the inserted materials feature a residual moisture of 10%.
3. Method according to claim 1, in which the material is transported continuously at a speed of 18 m/h to the discharge opening.
4. Method according to claim 1, in which an energy input on the material of 70% is carried out in the first quarter of the container.
5. Method according to claim 1, in which in each further quarter of the container an energy input of 10% each is carried out.
6. Method according to claim 1, in which the energy input in the first quarter is carried out by a burner.
7. Method according to claim 1, in which the energy input in the further quarters of the container is carried out by heated air.

8. Method according to claim 1, in which the energy input is carried out at least in the first quarter directly on the material.
9. Method according to claim 1, in which a maximum temperature of 600 -700 °C is implemented in the container to start the process.
10. Method according to claim 1, in which the discharged exhaust gas-solids mixture is fed into a device for cracking the long-chain hydrocarbons after the container.
11. Method according to claim 1, in which after the container the discharged exhaust gas-solids mixture or after the cracking of the long-chain hydrocarbons, the exhaust gas-solids mixture is conveyed to a device for the gasification of the energy components.
12. Method according to claim 1, in which the gasification is carried out with hypostoichiometric air supply.
13. Method according to claim 1, in which the gasification process is regulated via the partial combustion process.
14. Method according to claim 1, in which steam is added to the gasification process.
15. Device for removing recoverable waste products and non-recoverable waste products, comprising a tubular container with a feed opening for the recoverable and non-recoverable waste products as material on one side and with a discharge opening for the exhaust gas-solids mixture on the other side, a shaft arranged centrally through the container on which devices are located and a device for cracking hydrocarbons and/or a device for the gasification of the solids from the container, that are arranged after the discharge opening of the container.
16. Device according to claim 15, in which the tubular container is made of sheet metal in

a double-walled construction.

17. Device according to claim 15, in which the feed opening is arranged as a stuffing screw with a gate valve in the upper front area of the container.
18. Device according to claim 15, in which a burner is arranged in the lower front area of the container.
19. Device according to claim 15, in which the shaft is constructed in tubular form.
20. Device according to claim 15, in which devices to transport the material are installed on the shaft.
21. Device according to claim 20, in which the devices are paddles.
22. Device according to claim 20, in which the paddles feature pitched surfaces.
23. Device according to claim 15, in which the devices are attached to the shaft with keyed joints.
24. Device according to claim 15, in which the shaft is located outside the container.
25. Device according to claim 15, in which grates to collect the material are arranged over the entire length of the container in the lower area.
26. Device according to claim 15, in which a blade-like device is arranged at the discharge opening of the container for discharging the exhaust gas-solids mixture.
27. Device according to claim 15, in which a device for cracking the long-chain hydrocarbons and a device for the gasification of the exhaust gas-solids mixture are arranged after the

container.

28. Device according to claim 27, in which the cracking and the gasification are carried out in one device.
29. Device according to claim 15, in which the tubular container features an ignition source in the area of the discharge opening.
30. Device according to claim 29, in which the ignition source is a burner with an open flame or a spiral-wound filament.
31. Device according to claim 15, in which the tubular container features a pressure release opening in the upper part in the area of the discharge opening.
32. Device according to claim 31, in which the pressure release opening is a flap or a weighted safety valve.

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
8. Februar 2001 (08.02.2001)

PCT

(10) Internationale Veröffentlichungsnummer
WO 01/09267 A1(51) Internationale Patentklassifikation⁷: C10B 53/00,
47/40, 51/00, C10J 3/00

(21) Internationales Aktenzeichen: PCT/DE00/02659

(22) Internationales Anmeldedatum:
2. August 2000 (02.08.2000)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
199 37 524.0 3. August 1999 (03.08.1999) DE

(71) Anmelder und

(72) Erfinder: MARTIN, Harald [DE/DE]; Fliederweg
61, D-06567 Bad Frankenhausen (DE). STREITEN-
BERGER, Hartwig [DE/DE]; Kunitzer Strasse 26,
D-07751 Golmsdorf (DE).(74) Anwalt: RAUSCHENBACH, Marion; PF 27 01 75,
D-01172 Dresden (DE).(81) Bestimmungsstaaten (national): AE, AG, AL, AM, AT,
AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ,DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO,
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,
TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.(84) Bestimmungsstaaten (regional): ARIPO-Patent (GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), eura-
sisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI,
FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI-Patent
(BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE,
SN, TD, TG).

Veröffentlicht:

- Mit internationalem Recherchenbericht.
- Vor Ablauf der für Änderungen der Ansprüche geltenden
Frist; Veröffentlichung wird wiederholt, falls Änderungen
entgegen.

Zur Erklärung der Zweibuchstaben-Codes, und der anderen
Abkürzungen wird auf die Erklärungen ("Guidance Notes on
Codes and Abbreviations") am Anfang jeder regulären Ausgabe
der PCT-Gazette verwiesen.

(54) Title: METHOD AND DEVICE FOR REMOVING RECOVERABLE WASTE PRODUCTS AND NON-RECOVERABLE
WASTE PRODUCTS(54) Bezeichnung: VERFAHREN UND VORRICHTUNG ZUM BESEITIGEN VON ABPRODUKTEN UND ABFALLSTOF-
FEN

(57) Abstract: The invention relates to a method and to a device used in the field of waste management for utilizing recoverable waste products as efficiently as possible. The aim of the invention is to reduce the environmental impact of such a method to a minimum. According to the inventive method, the recoverable waste products and the non-recoverable waste products are introduced from one side into a substantially vertical stationary container and are transported in a continuous and discontinuous manner to the other side of the container. The amount of energy added is 60 to 80 % in the front zone and 20 to 40 % in the other zones. The invention further relates to a device that consists of a tubular stationary container with a shaft that is provided with devices and that extends through the center of the container.

(57) Zusammenfassung: Die Erfindung bezieht sich auf das Gebiet der Abfallwirtschaft und betrifft ein Verfahren und eine Vorrichtung, die Abprodukte einer möglichst umfassenden Verwertung zuführen. Die Aufgabe der Erfindung besteht darin, eine möglichst geringe Umweltbelastung zu erhalten. Gelöst wird die Aufgabe durch ein Verfahren, bei dem die Abprodukte und Abfallstoffe in einen im wesentlichen waagerechten feststehenden Behälter von einer Seite eingebracht und in diesem kontinuierlich und diskontinuierlich zur anderen Seite des Behälters transportiert werden, und der Energieeintrag im vorderen Bereich 60 - 80 % und in den anderen Bereichen 20 - 40 % beträgt. Die Aufgabe wird weiterhin gelöst durch eine Vorrichtung, bestehend aus einem rohrförmigen feststehenden Behälter mit einer mittig durch den Behälter geführten Welle, an der sich Vorrichtungen befinden.



WO 01/09267 A1

21935.DC2

Page 1 of 3

Declaration and Power of Attorney For Utility or Design Patent Application

Erklärung für Patentanmeldungen zur Gebrauchseignung und Entwicklung mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

daß mein Wohnsitz, meine Postanschrift und meine Staatsangehörigkeit den im nachstehenden nach meinem Namen aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent für die Erfindung mit folgendem Titel beantragt wird:

VERFAHREN UND VORRICHTUNG ZUM BESEITIGEN VON ABPRODUKTEN UND ABFALLSTOFFEN

deren Beschreibung hier beigelegt ist, es sei denn (in diesem Falle Zutreffendes bitte ankreuzen), diese Erfindung

☒ wurde angemeldet am 2 August 2000
unter der US-Anmeldenummer 10/030,177
und wurde am _____ abgeändert (falls zutreffend)
oder

unter der PCT internationalen Anmeldungsnummer
PCT/DE00/02659
und wurde am 27 September 2001 abgeändert (falls zutreffend).

Ich bestätige hiermit, daß ich den Inhalt der oben angegebene Patentanmeldung, einschließlich der Ansprüche, die eventuell durch einen oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und verstanden habe

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, Code of Federal Regulations, § 1.56 von Belang sind.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title 35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderurkunden, oder § 365(a) aller PCT internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen für Patente bzw. Erfinderurkunden oder PCT internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht.

Prior Foreign Applications

Frühere ausländische Anmeldungen

<u>199 37 524.0</u>	<u>Germany</u>	<u>3/August/1999</u>
(Number)	(Country)	(Day/Month/Year Filed)
(Number)	(Land)	(Tag/Monat/Jahr der Anmeldung)
(Number)	(Country)	(Day/Month/Year Filed)
(Number)	(Land)	(Tag/Monat/Jahr der Anmeldung)

☐ Zusätzliche einstweilige Anwendungsnummern sind im Prioritätsanhang aufgeführt.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND DEVICE FOR REMOVING RECOVERABLE WASTE PRODUCTS AND NON-RECOVERABLE WASTE PRODUCTS

the specification of which is attached hereto unless the following box is checked.

☒ was filed on 2 August 2000 as
United States Application Number 10/030,177
and was amended on _____ (if applicable)
or,

PCT International Application Number PCT/DE00/02659
and was amended on 27 September 2001 (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority under Title 35, United States Code § 119 (a-d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States, listed below. I have also identified below, by checking the "No" box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Priority Claimed

Prioritätsanspruch

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

1935 DC2

Page 2 of 3

German Language Utility or Design Patent Application Declaration

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt:

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Application Number)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

(Application Number)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

(Application Number)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

- ☐ Zusätzliche einstweilige Anmeldeungsnummern sind im ergänzenden Prioritätsanhang aufgeführt.

- ☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

(Application No.)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr eingereicht)

(Status)
(patentiert, schwebend, aufgegeben)
(patented, pending, abandoned)

(Application No.)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr eingereicht)

(Status)
(patentiert, schwebend, aufgegeben)
(patented, pending, abandoned)

- ☐ Zusätzliche USA oder internationale Anmeldeungsnummern sind im ergänzenden Prioritätsanhang aufgeführt.

- ☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachte Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

Hiermit bevollmächtigt der Unterzeichnete den hierin genannten entweder USA-Anwalt oder Stellvertreter, in der Abwesenheit einer direkten Verständigung zwischen den USA-Anwalt oder Stellvertreter und dem Unterzeichneten Anweisungen, die der der Anmeldung betreffend dem Patent und Warenzeichen Amt zugestellt werden, von entweder seinem ausländischen Patentvertreter oder Stellvertreter der Gesellschaft anzunehmen und auszuführen. Sollte sich das Personal ändern, von dem Anweisungen angenommen werden mögen, dann wird der hierin genannte USA-Anwalt oder Stellvertreter entsprechend von

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

21938.DC2

Page 3 of 3

German Language Utility or Design Patent Application Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den sich mit der Kundennummer befassenden Patentanwalt (Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt und weise an, dass alle Korrespondenz mit dieser Kundennummer adressiert wird.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

KUNDENNUMMER 7055

CUSTOMER NUMBER 7055

Die ernannten Patentanwälte sind zur Zeit:

Neil F. Greenblum Reg. No. 28,394
Bruce H. Bernstein Reg. No. 29,027
Arnold Turk Reg. No. 33,094
James L. Rowland Reg. No. 32,674

The appointed attorneys presently include:

Stephen M. Roylance Reg. No. 31,296
Leslie J. Paperner Reg. No. 33,329
William Pieprz Reg. No. 33,630
William E. Lyddane Reg. No. 41,568

Address: **Greenblum & Bernstein, P.L.C.**
1941 Roland Clarke Place
Reston, VA 20191


Telefongespräche bitte richten an:

Direct Telephone Calls to:

Greenblum & Bernstein, P.L.C.
(703) 716-1191

Vor-und Nachname des einzigen oder ersten Erfinders: Harald MARTIN	Full name of sole or first inventor Harald MARTIN
Unterschrift des Erfinders <i>Harald Martin</i>	Inventor's signature Date 19.02.2002
Wohnsitz Bad Frankenhausen, Deutschland	Residence Bad Frankenhausen, Germany
Staatsangehörigkeit Deutschland	Citizenship Germany
Postanschrift Fliederweg 61, D-06567 Bad Frankenhausen, Deutschland	Post Office Address Fliederweg 61, D-06567 Bad Frankenhausen, Germany
Vor-und Nachname des zweiten Miterfinders (falls zutreffend) Hartwig STREITENBERGER	Full name of second joint inventor, if any Hartwig STREITENBERGER
Unterschrift des zweiten Erfinders <i>Hartwig Streitberger</i>	Second Inventor's Signature Date 22.02.2002
Wohnsitz Golmsdorf, Deutschland	Residence Golmsdorf, Germany
Staatsangehörigkeit Deutschland	Citizenship Germany
Postanschrift Kunitzer Strasse 26, D-07751 Golmsdorf, Deutschland	Post Office Address Kunitzer Strasse 26, D-07751 Golmsdorf, Germany
(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).	(Supply similar information and signature for third and subsequent joint inventors).

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

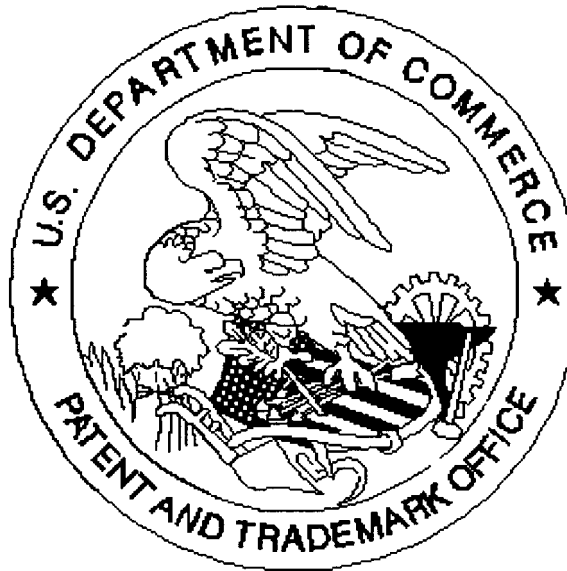

Application deficiencies found during scanning:

☐ Page(s) _____ of Drawing were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ *Scanned copy is best available. Declaration*